

3-PHASE EMC POWER
LINE FILTER

KRF



Limits high frequency noise


- Reduces interference
- Protects sensitive equipment
- Eliminates drive cross-talk
- Meet FCC Regulation 15, Subpart J




3-PHASE EMC POWER LINE FILTER

KRF

Before KRF

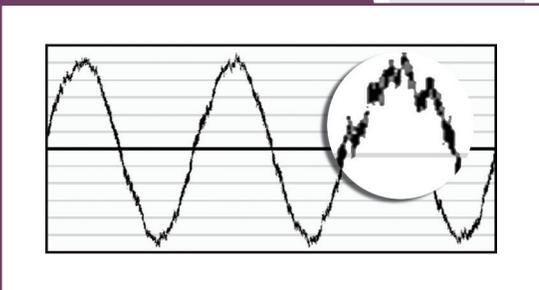

After KRF

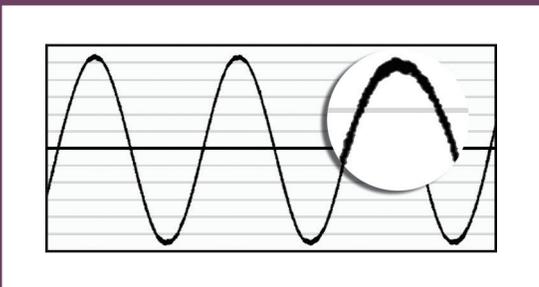

Non-Linear Loads can draw harmonic current from the source, resulting in harmful high frequency noise

There are many pieces of equipment that can generate EMI (electro magnetic interference), variable frequency drives included. In the case of variable frequency drive, the electrical noise produced is primarily contained in the switching edges of the PWM controller. Increases in switching frequencies also increase the effective edge frequencies produces, thereby increasing the amount of electrical noise.

Reduce High Frequency Distortion


KRF filters use a combination of high frequency inductors and capacitors to reduce noise in the critical 150 kHz to 30 MHz frequency range. The inductors act as open circuits and the capacitors act as short circuits at high frequencies while allowing the lower power line frequencies to pass untouched.

KRF filters assist with cost effective compliance to EMC directives, in a compact, efficient, light-weight design. The high common mode and differential mode reduction in the critical 150 kHz to 30 MHz frequency ensures that potential interference from AC drives is reduced or eliminated.


EMI (Electro Magnetic Interference) RFI (Radio Frequency Interference)

The terms EMI and RFI are often used interchangeably. EMI is actually any frequency of electrical noise, whereas RFI is a specific subset of electrical noise on the EMI spectrum. Conducted EMI is unwanted high frequencies that ride on the AC wave form.


Incorrect
Interconnection
Layout



Correct
Interconnection
Layout

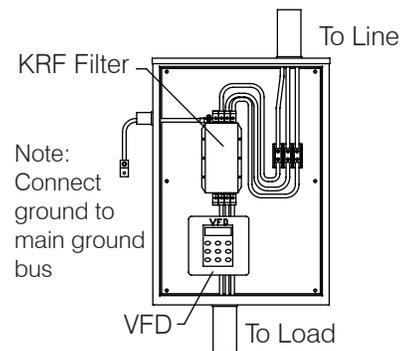

Part Numbering System

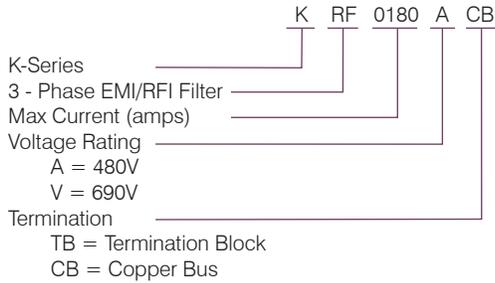


Equipment Interference and Failure

The power line noise emissions associated with variable frequency drives can cause disturbances in nearby equipment. Typical disturbances include:

- Dimmer and ballast instability
- Lighting disturbances such as flashing
- Poor radio reception
- Instability of control systems
- Common Links
- Flow metering fluctuation
- Computer system failures
- Remote I/O
- Encoder feedback
- Nuisance faults PLC
- Analog meter bouncing
- Thermostat control problems

Typical Circuit Diagram

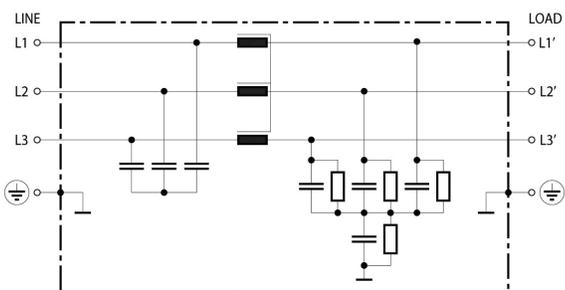

Product Specifications

- 3-Phase
- System Voltage:
480 VAC (applied to 240 VAC - 520 VAC)
690 VAC (applied to 600 VAC - 760 VAC)
- Amp Ratings:
480V (8 - 2500)
690V (25 - 2500)
- Fundamental Frequency: 50/60 Hz
- Units to accommodate up to 2,500 amps
- Filtering: Advanced two-stage filtering design
- Warranty: 1 year
- Ambient Temperature: -25° to 100° C
- Maximum Altitude: 1,000 meters (3,000 feet)
Derating necessary above 1,000 meters
- Short Term Overload Rating: 150% rated I for 3 minutes or 250% for 30 seconds
- Tested Value: 100% tested for Hipot, ground continuity, input-output continuity and insertion loss characteristic
- Agency Approvals: ENEC, cUR



Reliable  Advanced Power Quality

KRF Typical Applications

- Motor drives
- Elevators
- Commercial Buildings
- Wind farms
- Photovoltaics
- UPS
- Power supplies

Additional Power Quality Solutions:



HarmonicGuard® Active (HGA) Filter

- Helps meet IEEE-519
- Reduces current harmonic distortion to less than 5% at full load
- Actively monitors system current, improves power factor to near unity
- Built-in touchscreen display & Modbus RTU



HarmonicGuard® Passive (HGP) and HarmonicGuard® HG7 Filters

- Helps meet IEEE-519
- Improves power factor
- The HGP limits current harmonic distortion to less than 5% over a wide load range
- The HG7 reduces current harmonic distortion to less than 7% at full load



KDR Line Reactor

- Prevents nuisance tripping
- Protects the source by lowering current distortion created by the drive



MotorGuard™ Sinewave Output Filter

- Protects the motor by converting the PWM waveform into a near sinusoidal wave
- Prevents voltage overshoots that cause early degradation of insulation systems in motors, transformers, and cables
- Extends motor life by reducing operating temperature



V1k Motor Protection Output Filter

- Protects the motor from voltage spikes due to dv/dt
- Helps stop motor insulation breakdown
- Protects cable runs (up to 3,000 feet) and reduces motor heating, noise and vibration

Part Number: 23736 Version 1.4

© Copyright 2015

TCI, LLC
www.transcoil.com

W132 N10611 Grant Drive
Germantown, WI 53022
USA

Toll Free: 800-824-8282
P: 414-357-4480
F: 414-357-4484

Please contact us about
specific products and services.



Line Reactors • Harmonic Filters • EMC Filters • dv/dt Filters • Sinewave Filter